

Client \_\_\_\_\_ Quantity \_\_\_\_\_  
Project \_\_\_\_\_ Position \_\_\_\_\_

## Modi Active Blast Chiller

**Model:** W3AG

**Cod:** W11023220211




### Technical data

<b>Gross capacity:</b>	38 lt
<b>Temperature range:</b>	-40°+65°C
<b>Ventilation range:</b>	25% - 100%
<b>Humidifier:</b>	Not available
<b>Refrigerant unit:</b>	Plug-in
<b>Yield +90 / +3:</b>	7 Kg
<b>Yield +90 / -18:</b>	3,5 Kg
<b>Climate class:</b>	5
<b>Cooling gas:</b>	R290
<b>Defrost:</b>	Forced air
<b>Valve:</b>	Mechanical expansion
<b>Dimensions (mm):</b>	600×622×418 mm
<b>Packing dimensions:</b>	805×800×835 mm
<b>Gross weight:</b>	45 Kg
<b>Voltage:</b>	220-240 V - 50 Hz
<b>Total rate:</b>	540 W
<b>Absorbed Current:</b>	2,8 A
<b>Cooling capacity:</b>	900 W*
<b>*:</b>	Evap. -10°C Cond. +45°C

### Features

<b>Functions:</b>	Blast chilling, shock freezing, thawing, proving, holding, desiccation, chocolate, manual cycle
<b>Standard equipment:</b>	Support for 4 positions GN2/3
<b>Control:</b>	4.3" touch screen display
<b>Doors:</b>	Left-hand hinges - 135° opening
<b>Door gasket:</b>	Magnetic, triple chamber and easily replaceable
<b>Core probe:</b>	Needle probe with 1 reading point, quick-release and easily replaceable
<b>Insulation:</b>	50 mm thickness - CFC/HCFC free
<b>Exterior/interior finishing:</b>	Exterior and interior AISI 304 stainless steel.
<b>Inner corners:</b>	Rounded for easy cleaning, diamond-coated bottom
<b>Racks and slides:</b>	Structure in stainless steel wire AISI 304
<b>Feets:</b>	AISI 304 stainless steel, h 18 mm
<b>Cosmo:</b>	Wi-Fi remote control system

**Technical draw**

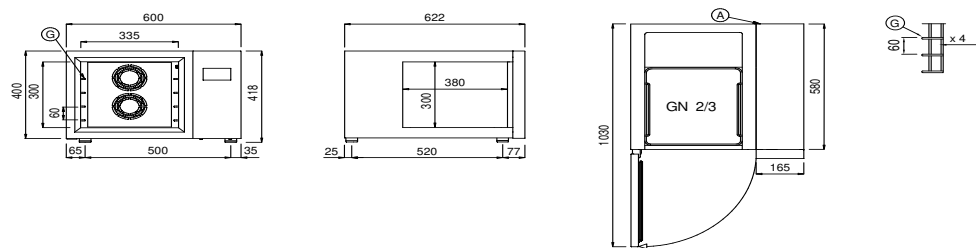

**A:** Power supply cable outlet

**G:** Racks pitch

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previously or subsequently sold.